



# SPECIFICATION SHEET

## 19-D650



4342

### G-TEK® CR PLUS SEAMLESS KNIT SPUN DYNEEMA® / NYLON GLOVE WITH POLYURETHANE COATED SMOOTH GRIP ON PALM & FINGERS

- Seamless construction offers increased comfort and breathability
- Spun Dyneema® & Nylon shell is lightweight and provides excellent dexterity, tactile sensitivity and cut resistance
- Polyurethane coated palm and fingertips for great abrasion resistance, excellent puncture resistance and outstanding wet/dry grip
- Knit Wrist helps prevent dirt and debris from entering the glove
- Cotton color binding denotes sizing
- Washable, resistant to chemicals, water, and ultraviolet light

### APPLICATIONS

- Electronics
- Glass cutting
- Metal handling
- Food and meat processing

### CARE INSTRUCTIONS

Recommend washing gloves in slightly warm water not exceeding 40°C. A mild non-ionic detergent should be used. A 5-10 minute cycle time should be employed. Tumble dry on low - maximum temperature 140°F (60°C)

### TECHNICAL DATA

|             |                                                           |                  |                    |                  |                    |
|-------------|-----------------------------------------------------------|------------------|--------------------|------------------|--------------------|
| MATERIAL    | Shell: Dyneema® / Nylon / Lycra®<br>Coating: Polyurethane |                  |                    |                  |                    |
| COLOR       | ■ Gray                                                    |                  |                    |                  |                    |
| CUFF STYLE  | Continuous Knit                                           |                  |                    |                  |                    |
| SIZES       | S - XXL                                                   |                  |                    |                  |                    |
| PACKAGING   | 1 pair per bag, 12 pairs per dozen, 12 dozen per case     |                  |                    |                  |                    |
| CASE        | 22" x 12.6" x 14.2" / 56cm x 32cm x 36cm                  |                  |                    |                  |                    |
| CASE WEIGHT | S                                                         | M                | L                  | XL               | XXL                |
|             | 16.8 lbs<br>7.6 kg                                        | 18 lbs<br>8.2 kg | 18.7 lbs<br>8.5 kg | 21 lbs<br>9.5 kg | 21.6 lbs<br>9.8 kg |
| COO         | China                                                     |                  |                    |                  |                    |

### PERFORMANCE PROPERTIES

EN388: 4342 ASTM F2992-15 ANSI Cut Level A2 (Adopted by ANSI/ISEA 02/16)  
ASTM F1790-05 ANSI Cut Level 2

|          |   |   |   |   |   |   |
|----------|---|---|---|---|---|---|
| ABRASION | 0 | 1 | 2 | 3 | 4 | 5 |
| CUT      | 0 | 1 | 2 | 3 | 4 | 5 |
| TEAR     | 0 | 1 | 2 | 3 | 4 | 5 |
| PUNCTURE | 0 | 1 | 2 | 3 | 4 | 5 |


### BARCODES

| ITEM          | BAG | DOZEN          | CASE           |
|---------------|-----|----------------|----------------|
| ■ 19-D650/S   | --  | 01616314046369 | 02616314046368 |
| ■ 19-D650/M   | --  | 01616314046352 | 02616314046351 |
| ■ 19-D650/L   | --  | 01616314046345 | 02616314046344 |
| ■ 19-D650/XL  | --  | 01616314046376 | 02616314046375 |
| ■ 19-D650/XXL | --  | 01616314048936 | 02616314048935 |



### DIMENSIONS (in/cm)

|   | S        | M         | L        | XL         | XXL        |
|---|----------|-----------|----------|------------|------------|
| A | 9.1 / 23 | 9.4 / 24  | 9.8 / 25 | 10.2 / 26  | 10.6 / 27  |
| B | 3.5 / 9  | 3.7 / 9.5 | 3.9 / 10 | 4.1 / 10.5 | 4.1 / 10.5 |
| H | Red      | Yellow    | Brown    | Black      | Blue       |

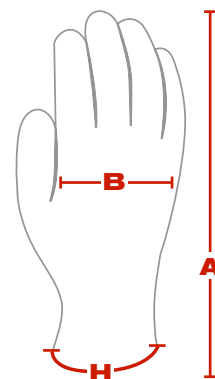

PROTECTIVE INDUSTRIAL PRODUCTS, INC. | BRINGING THE BEST OF THE WORLD TO YOU®

AMERICAS: (800) 262-5755 • (518) 861-0133 | EUROPE: +34-96182-41-48 | AMEA: (ASIA, MIDDLE EAST, AFRICA) 852-2475-9228 | [www.pipglobal.com](http://www.pipglobal.com)

This document and the information contained herein is the property of Protective Industrial Products, Inc. (PIP) and may not be used or reproduced without permission. Product users should conduct all appropriate testing or other evaluations to determine the suitability of PIP products for a particular purpose or use within a particular environment. PIP DISCLAIMS ALL WARRANTIES OTHER THAN AS EXPRESSLY PROVIDED.