

Example of machining - re-turning of railway wheels

1. RE-TURNING OF HARD WORN WHEEL 2 holders in machine Holder description (2 cart.): DKTR 5555 X C2 Cartridge (right): KTP-LANR 30 Insert: LNMX 301940SN-RM; 9315 Cartridge (left): KTP-LFNL 19 Insert: LNMX 191940SN-RM; 9315 Holder description (1 cart.): DKTR 5555 X C1 Cartridge (right): KTP-LANR 30 Insert: LNMX 301940SN-RM; 9315 Cutting conditions: cutting speed: $v_c = 50 - 70$ m/min feed per revolution: $f = 0,55 - 0,8$ mm/rev. axial cutting depth: $a_p = 3 - 10$ mm	Step 1	Step 2	Step 3	Step 4
2. RE-TURNING OF HARD WORN WHEEL 1 holder in machine Holder description (2 cart.): DKTR 5055 X A2 Cartridge (right): KTP-LANR 30 Insert: LNMX 301940SN-RM; 9315 Cartridge (left): KTP-LFNL 19 Insert: LNMX 191940SN-RM; 9315 Cutting conditions: cutting speed: $v_c = 80 - 90$ m/min feed per revolution: $f = 0,4 - 1,0$ mm/rev. axial cutting depth: $a_p = 3 - 5$ mm	Step 1	Step 2	Step 3	Step 4
3. RE-TURNING OF LESS WORN WHEEL 1 holder in machine Holder description (2 cart.): DKTR 5050 X D2 Cartridge (right): KTP-LANR 30 Insert: LNMX 301940SN-RF; 9315 Cartridge (left): KTP-LFNL 19 Insert: LNMX 191940SN-RF; 9315 Cutting conditions: cutting speed: $v_c = 80 - 90$ m/min feed per revolution: $f = 0,4 - 1,0$ mm/rev. axial cutting depth: $a_p = 3 - 5$ mm	Step 1	Step 2		
4. RE-TURNING OF WHEEL - 1ST PROFILE 1 holder in machine Holder description (2 cart.): DKTR 5050 X D2 Cartridge (right): KTP-SANR 30 Insert: SNMX 191140SN-RF; 9315 Cartridge (left): KTP-SFNL 19 Insert: SNMX 191140SN-RF; 9315 Cutting conditions: cutting speed: $v_c = 60 - 70$ m/min feed per revolution: $f = 0,4 - 1,0$ mm/rev. axial cutting depth: $a_p = 2 - 4$ mm	Step 1	Step 2		



Pramet Tools, s.r.o., Unicovska 2, 787 53 Sumperk, CZECH REPUBLIC
 Phone: 583 381 111, Fax: 583 215 401, E-mail: pramet.info.cz@pramet.com

BRAZIL • Pramet Ind. e Com. de Ferramentas Ltda., Sorocaba / SP, Tel./Fax: +55 15 3325-6162, E-mail: pramet.info.br@pramet.com
GERMANY • Pramet GmbH, Erlangen, Telefon: + 49 9131 / 93 37 40, E-mail: pramet.info.de@pramet.com
CHINA • 中国 • 普拉米特刀具上海有限公司, 电话: 86-21-5221 2712, 邮箱: pramet.info.cn@pramet.com
HUNGARY • Pramet Kft., Budapest, Tel.: + 36-1-382-90-82, E-mail: pramet.info.hu@pramet.com
INDIA • Pramet Tools India Pvt Ltd, Gurgaon, Phone: + 91 124 4703825, E-mail: pramet.info.in@pramet.com
ITALY • Pramet SRL, Lainate (MI), Telefono: + 39 02 / 93 79 94 82, E-mail: pramet.info.it@pramet.com
POLAND • Pramet Sp. z o.o., Sosnowiec, Telefon: + 48 32 / 78 15 890, E-mail: pramet.info.pl@pramet.com
RUSSIA • ООО «Праммет», Москва, РФ, Тел.: +7 495 739 57 23, 739 57 22, E-mail: pramet.info.ru@pramet.com
SLOVAKIA • Pramet Slovakia, Žilina, Telefon: + 421 41 / 764 54 60, E-mail: pramet.info.sk@pramet.com
www.pramet.com



P28 • Railways 2011 • ©PrametTools 09/2011

PRAMET
STEEL AGE

RENOVATION OF PROFILE
 ON RAILWAY WHEEL



COMPLETE LINE OF TOOLS
 NEW INSERTS LNMX / SNMX
 NEW RANGE OF CHIPBREAKERS

**TOOLS
 FOR RE-TURNING
 OF RAILWAY WHEEL**

www.pramet.com



PRAMET STEEL AGE

NEW ASSORTMENT OF INSERTS AND TOOLS FOR RE-TURNING OF RAILWAY WHEEL

MAIN BENEFITS:



- complete line of tools for re-turning of railway wheel
- wide assortment of holders for Hegenscheidt and Rafamet lathe
- exchangeable cartridges with support protective cemented carbide shim
- new geometries of inserts LNMX 19, LNMX 30 and SNMX 19
- new assortment of inserts LNMX 19 with chipbreakers RF and RM
- new assortment of inserts LNMX 30 with chipbreakers RF, RM and RR
- new type of double sided inserts SNMX 19 with chipbreaker RF
- new range of grades - 9310, 9315 and 9325


Technical information

Re-turning of railway wheel

Means wheel re-profiling on railway wheel. During renovations of railway wheels we talked about two basic conditions of wheels – soft wheels and hard wheels:

- soft wheels are typical own worn without badly damaged and defects
- hard wheels are very strenghten with surface defects and dirt (sand, stones) and with defects like skid flats, surface cracks etc.

Depending on status of wheel is necessary to adjust of cutting conditions i.e. cutting speed v_c , depth of cut a_p , feed f , choice of chipbreaker and grade of insert.

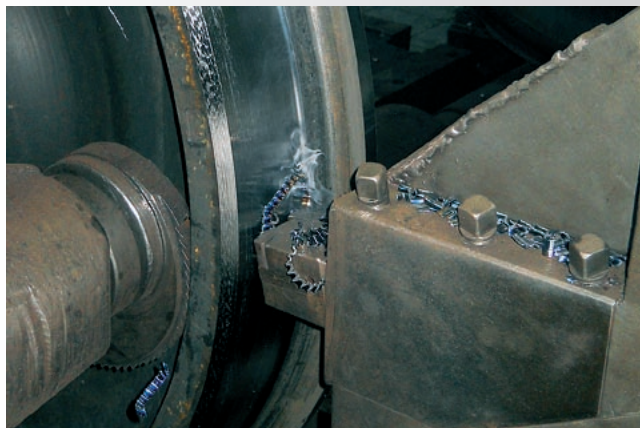


New complete line of tools

for re-turning of railway wheel included holders for lathe Hegenscheidt (Made in Germany) and lathe Rafamet (Made in Poland), exchangeable cartridges with inserts types LNM(U)X 19, LNM(U)X 30 and SNMX 19 with new range of chipbreakers RF, RM and RR.



Chipbreaker - **RF**

- for depth of cut a_p from 2 mm to 8 mm, feeds per revolution f from 0,4 mm/rev. to 1,1 mm/rev.
- choice of cutting speed depends on a_p , f and status of wheel
- suitable for middle cutting speeds v_c
- for inserts LNMX 19 and LNMX 30 it is suitable on soft wheels
- for new type double side inserts SNMX 19 it is given for machining of soft wheel, which profile is turned for the first time; by properly chosen of cutting conditions is possible to use inserts SNMX 19 for re-profiling on trams wheels, wheels from passenger cars and manipulation cars



Chipbreaker - **RM**

- for depth of cut a_p from 2 mm to 10 mm, feeds per revolution f from 0,45 mm/rev. to 1,8 mm/rev.
- choice of cutting speed depends on a_p , f and status of wheel
- optimum for lower to middle cutting speeds v_c
- for inserts LNMX 19 and LNMX 30 it is suitable on soft wheel also hard wheel



Chipbreaker - **RR**

- for depth of cut a_p from 2 mm to 12 mm, feeds per revolution f from 0,75 mm/rev. to 1,8 mm/rev.
- choice of cutting speed depends on a_p , f and status of wheel
- optimum for middle until higher cutting speeds v_c
- for inserts LNMX 30 it is suitable on soft wheel also hard wheel
- optimum for upper feeds f and depths of cuts a_p

Assortment of inserts

INITIAL CUTTING CONDITIONS

Basic shape of insert	ISO	Initial cutting conditions					
		P					
		f [mm/rev]		a_p [mm]		v_c [m/min]	
		min.	max.	min.	max.	min.	max.
	LNMX 191940SN-RF; 9310	0,40	1,10	2,0	5,0	85	105
	LNMX 191940SN-RF; 9315	0,45	1,40	2,0	5,0	60	90
	LNMX 191940SN-RF; 9325	0,45	1,40	2,0	5,0	50	80
	LNMX 301940SN-RF; 9310	0,40	1,10	2,0	8,0	80	105
	LNMX 301940SN-RF; 9315	0,40	1,10	2,0	8,0	60	90
	LNMX 301940SN-RF; 9325	0,40	1,10	2,0	8,0	50	85
	LNMX 191940SN-RM; 9310	0,45	1,40	2,0	5,0	80	100
	LNMX 191940SN-RM; 9315	0,45	1,40	2,0	5,0	60	90
	LNMX 191940SN-RM; 9325	0,45	1,40	2,0	5,0	50	80
	LNMX 301940SN-RM; 9310	0,55	1,80	2,0	10,0	75	100
	LNMX 301940SN-RM; 9315	0,55	1,80	2,0	10,0	55	85
	LNMX 301940SN-RM; 9325	0,55	1,80	2,0	10,0	40	75
	LNMX 301940SN-RR; 9310	0,75	1,80	2,0	12,0	70	95
	LNMX 301940SN-RR; 9315	0,75	1,80	2,0	12,0	55	80
	LNMX 301940SN-RR; 9325	0,75	1,80	2,0	12,0	40	65
	LNUX 191940SN-DF; 9230	0,70	1,50	2,0	6,0	80	125
	LNUX 301940SN-DM; 9230	0,80	1,50	3,0	10,0	125	175
	SNMX 191140SN-RF; 9310	0,40	1,10	4,0	7,0	80	95
	SNMX 191140SN-RF; 9315	0,40	1,10	4,0	7,0	60	85
	SNMX 191140SN-RF; 9325	0,40	1,10	4,0	7,0	50	75




New grades assortment of inserts

Microstructure	Applications area	Workpiece material group	Recommended application
9310	10 20 30 40	P M K	Description
			- The most wear resistant grade of new generation 9300 - Functional gradient substrate with low content of cobalt binder phase - Thick MT-CVD coating with unique Al_2O_3 top layer warrants extra-ordinary thermal, mechanical and chemical stability and protection of substrate. - Special final treatment after coating - Machining of material group P - Finishing, continuous cut, conditionally interrupted cut - High stability of cutting edge - High cutting speed
9315	10 20 30 40	P M K	Description
			- New material of generation 9300 characterized by high wear resistance with good considerable toughness - Functional gradient substrate with relatively low content of cobalt binder phase - Thick MT-CVD coating with unique Al_2O_3 top layer warrants extra-ordinary thermal, mechanical and chemical stability and protection of substrate. - Special final treatment after coating - Machining of material group P - Finishing, continuous and modestly interrupted cut - High stability of cutting edge - High and moderate cutting speed
9325	10 20 30 40	P M K	Description
			- The most versatile grade of new generation 93xx - Functional gradient substrate with moderate content of cobalt binder phase - Thick MT-CVD coating with unique Al_2O_3 top layer warrants extra-ordinary thermal, mechanical and chemical stability and protection of substrate. - Special final treatment after coating - Machining of material group P - Versatile application - Unfavourable cutting conditions, continuous and/or interrupted cut. - Medium and higher cutting speed

■ - Main application □ - Other applications □ - Conditional applications

DKTL/R

Holders for RAFAMET UBB 112 lathes

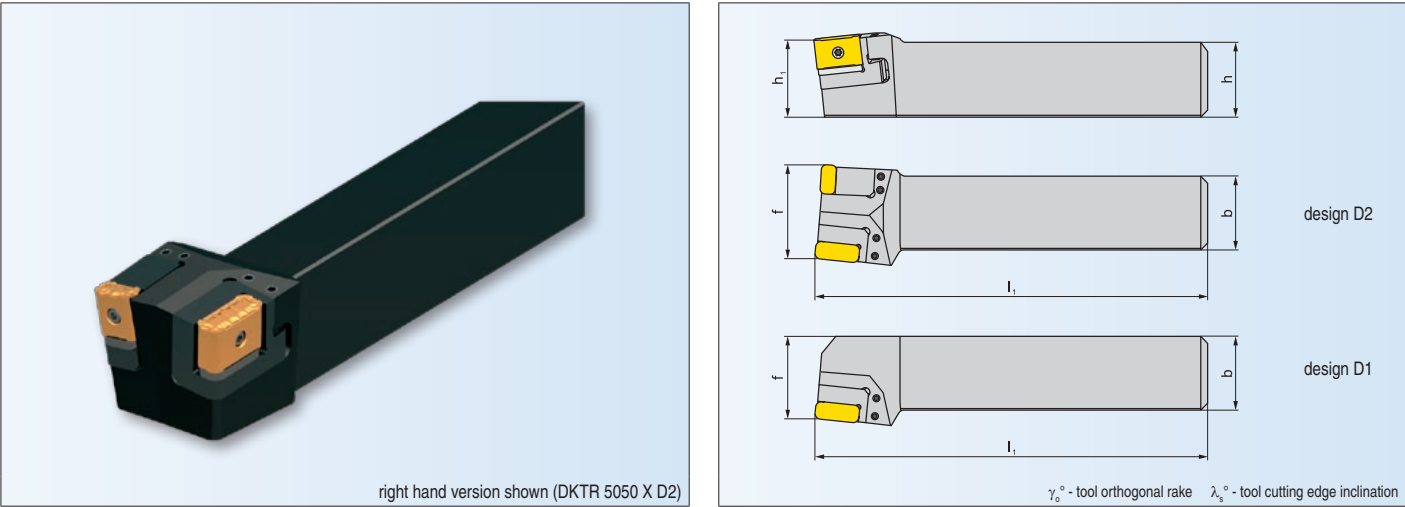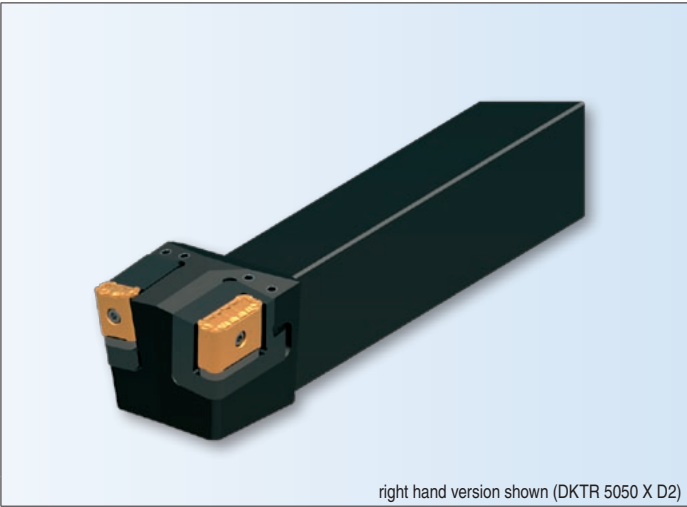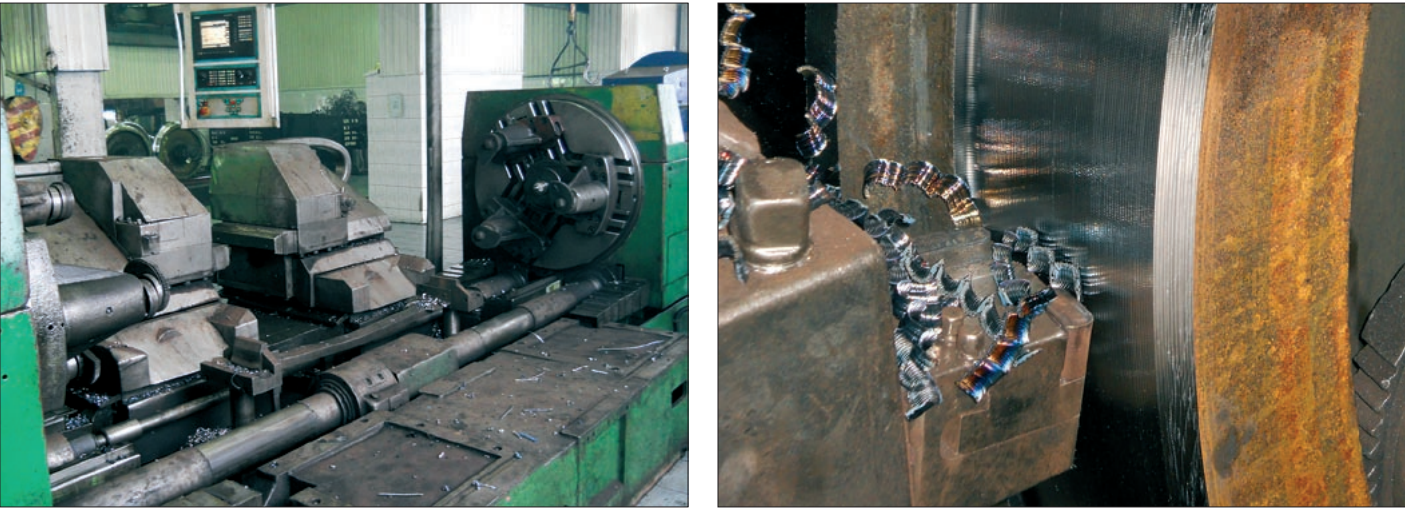

ISO	Assortment	Dimensions										kg	Spare parts	Cartridge
		h	b	l ₁	h ₁	f				λ _s °	γ _o °			
DKTL 5050 X D1	★	50	50	262	50	55				-6	-6	4,2	DKT	KTP-LANL 19
														KTP-LANL 30
														KTP-SANL 19
DKTR 5050 X D1	★	50	50	262	50	55				-6	-6	4,2	DKT	KTP-LANR 19
														KTP-LANR 30
														KTP-SANR 19
DKTL 5050 X D2	★	50	50	262	50	63				-6	-6	4,2	DKT	KTP-LANL 19
														KTP-LANL 30
														KTP-SANL 19
														KTP-LFNR 19
DKTR 5050 X D2	★	50	50	262	50	63				-6	-6	4,2	DKT	KTP-SFNR 19
														KTP-LANR 19
														KTP-LANR 30
														KTP-SANR 19
														KTP-LFNL 19
	KTP-SFNL 19													


SPARE PARTS

Group of spare parts	Screw	Key			
DKT	USS 0617	HXK 3			

★ - For request only.


All dimensions in [mm]

Indexable inserts for re-turning of railway wheels

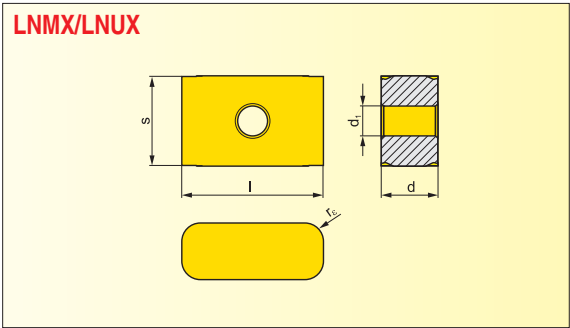

Size	l	d	d ₁	s
1919	19,05	10,00	6,35	19,05
3019	30,00	12,00	6,35	19,05

Chipbreaker	ISO	ANSI	Grades										Radius r _c	Feed per revolution		Cutting depth	
			9310	9315	9325	9330								f _{min}	f _{max}	a _{p min}	a _{p max}
	LNMX 191940SN-RF	LNMX --10SN-RF	●	●	●								4,0	0,40	1,10	2,0	5,0
	LNMX 301940SN-RF	LNMX --10SN-RF	●	●	●								4,0	0,40	1,10	2,0	8,0
	LNMX 191940SN-RM	LNMX --10SN-RM	●	●	●								4,0	0,45	1,40	2,0	5,0
	LNMX 301940SN-RM	LNMX --10SN-RM	●	●	●								4,0	0,55	1,80	2,0	10,0
	LNMX 301940SN-RR	LNMX --10SN-RR	●	●	●								4,0	0,75	1,80	2,0	12,0
	LNUX 191940SN-DF	LNUX --10SN-DF			●								4,0	0,70	1,50	2,0	6,0
	LNUX 301940SN-DM	LNUX --10SN-DM			●								4,0	0,80	1,50	3,0	10,0

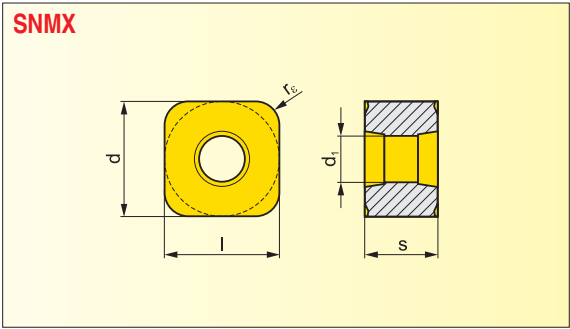

Size	l	d	d ₁	s
1911	19,05	19,05	7,75	11,00


Chipbreaker	ISO	ANSI	Grades										Radius r _c	Feed per revolution		Cutting depth	
			9310	9315	9325									f _{min}	f _{max}	a _{p min}	a _{p max}
	SNMX 191140SN-RF	SNMX 6-10SN-RF	●	●	●								4,0	0,40	1,10	2,0	7,0

● Stock assortment


○ Non-stock assortment

All dimensions in [mm]

SPECIAL indexable inserts for re-turning of railway wheels

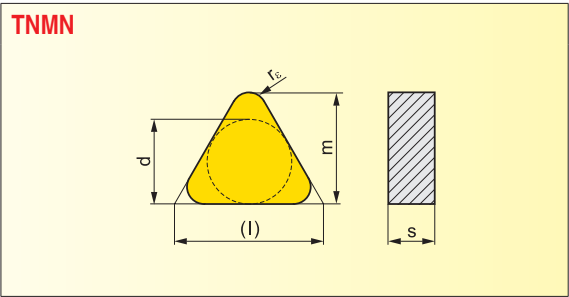

Size	l	d	m	s
32	32,20	18,60	23,60	10,00
33	33,00	19,05	24,60	10,00
39	39,32	22,70	28,05	9,60

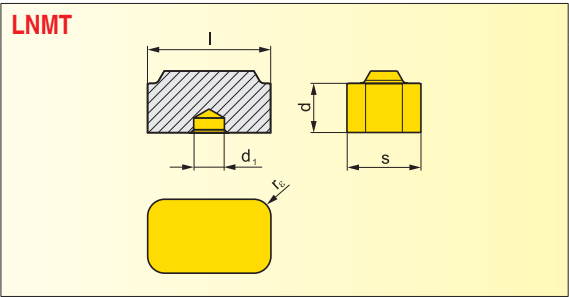[illegible]

Size	l	d	d ₁	s
3112	31,75	12,70	7,93	19,05

[illegible]

* - For request only. All dimensions in [mm]


Code designation of cartridges and holders

CARTRIDGES

1	2	3	4	5	6	7
KT	P	-	L	A	N	L 19

1	2	3
Cartridge	Clamping designation	Insert shape
7	P	S
Insert size		L
		

8	9				
Cartridge holder	Shank height [mm]				
11	50	55			

11		50	55		
Tool lenght		10			
X		Shank width [mm]			
		50	55		




	8	6	9	10	11	12
HOLDERS	DKT	R	50	55	X	A2

4		5		6	
Tool style Cutting edge angle		Clearance angle		Designation of cut	
					

12					
Type of machine					
A1	Henegscheid	(1 cartridge in holder)	C1	Rafamet UBB 112/2	(1 cartridge in holder)
A2	Henegscheid	(2 cartridges in holder)	C2	Rafamet UBB 112/2	(2 cartridges in holder)
B1	Rafamet UDA 125N	(1 cartridge in holder)	D1	Rafamet UBB 112	(1 cartridge in holder)
B2	Rafamet UDA 125N	(2 cartridges in holder)	D2	Rafamet UBB 112	(2 cartridges in holder)


DKTL/R

Holders for RAFAMET UBB 112/2 lathes

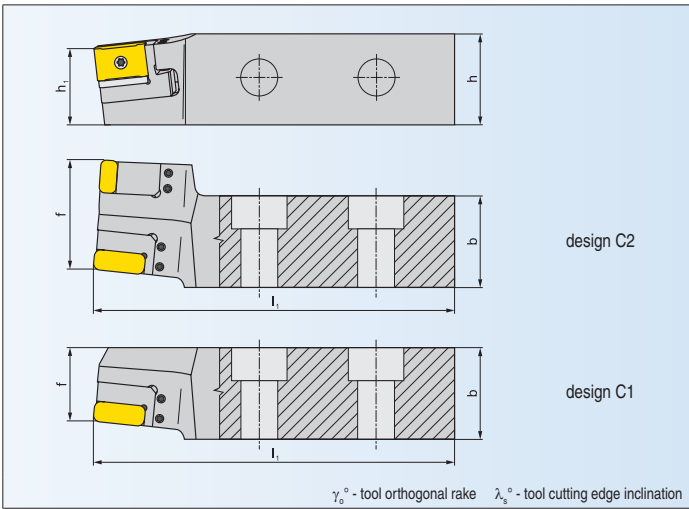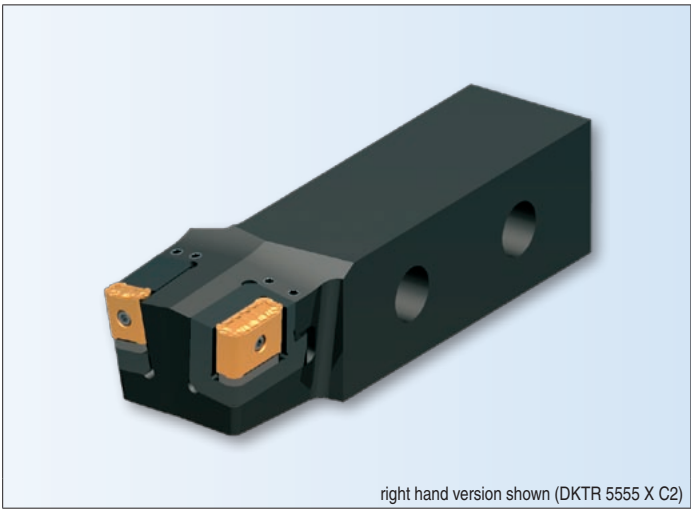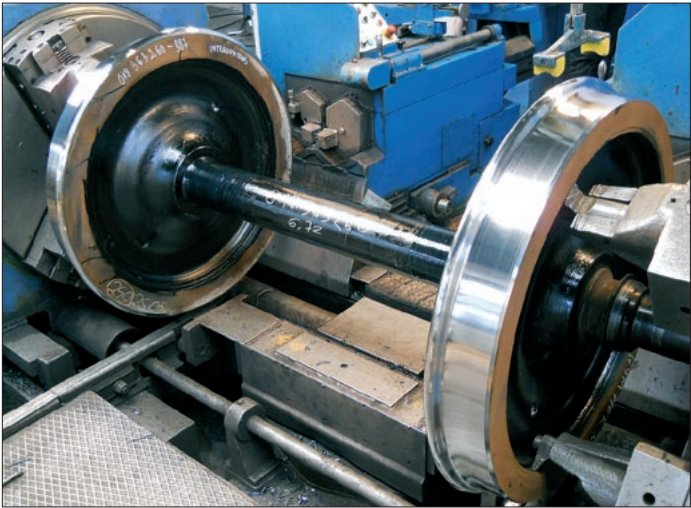

ISO	Assortment	Dimensions										kg	Spare parts	Cartridge
		h	b	l ₁	h ₁	f				λ _s °	γ °			
DKTL 5555 X C1	★	55	55	215	44	44				-6	-6	4,1	DKT	KTP-LANL 19
														KTP-LANL 30
														KTP-SANL 19
DKTR 5555 X C1	★	55	55	215	44	44				-6	-6	4,1	DKT	KTP-LANR 19
														KTP-LANR 30
														KTP-SANR 19
DKTL 5555 X C2	★	55	55	215	44	65				-6	-6	4,1	DKT	KTP-LANL 19
														KTP-LANL 30
														KTP-SANL 19
														KTP-LFNR 19
														KTP-SFNR 19
DKTR 5555 X C2	★	55	55	215	44	65				-6	-6	4,1	DKT	KTP-LANR 19
														KTP-LANR 30
														KTP-SANR 19
														KTP-LFNL 19
														KTP-SFNL 19



SPARE PARTS

Group of spare parts	Screw	Key				
						
DKT	USS 0617	HXK 3				

* - For request only. All dimensions in [mm]

DKTL/R

Holders for RAFAMET UDA 125N lathes

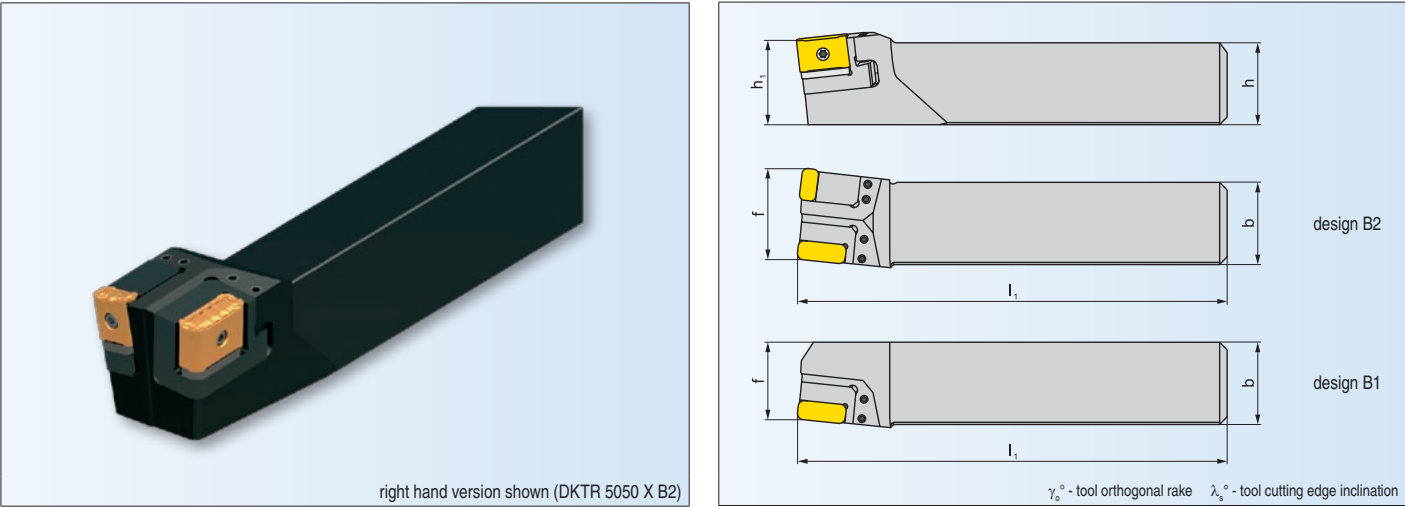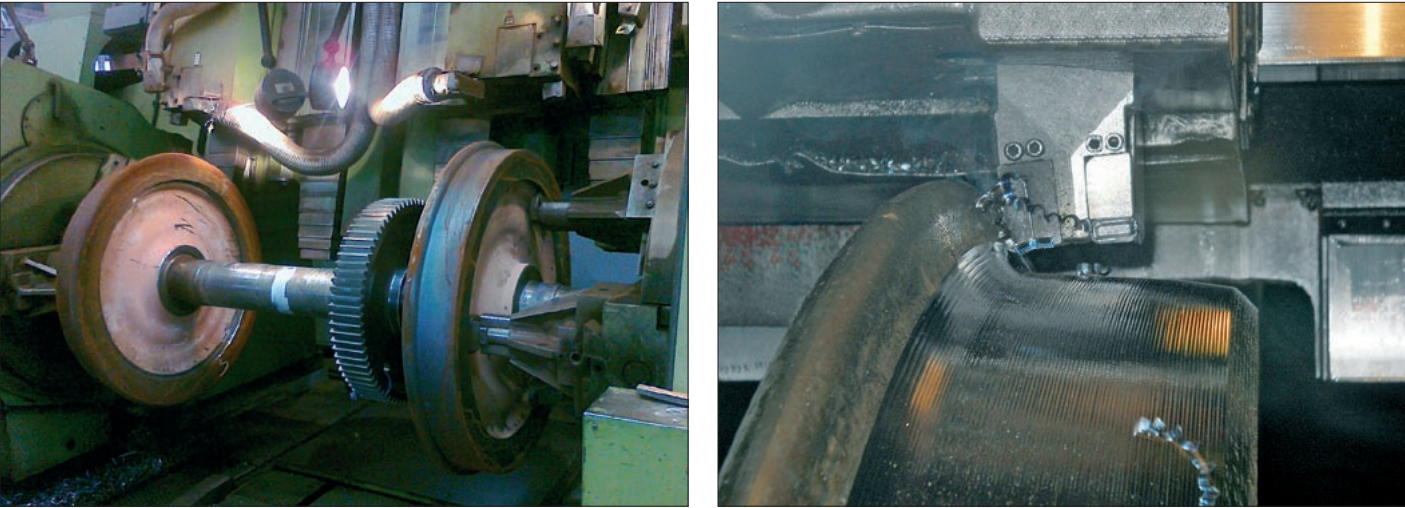

ISO	Assortment	Dimensions										kg	Spare parts	Cartridge
		h	b	l ₁	h ₁	f				λ _s °	γ _o °			
DKTL 5050 X B1	★	50	50	261	50	47				-6	-6	4,0	DKT	KTP-LANL 19
														KTP-LANL 30
														KTP-SANL 19
DKTR 5050 X B1	★	50	50	261	50	47				-6	-6	4,0	DKT	KTP-LANR 19
														KTP-LANR 30
														KTP-SANR 19
DKTL 5050 X B2	★	50	50	261	50	55				-6	-6	4,0	DKT	KTP-LANL 19
														KTP-LANL 30
														KTP-SANL 19
														KTP-LFNR 19
														KTP-SFNR 19
DKTR 5050 X B2	★	50	50	261	50	55				-6	-6	4,0	DKT	KTP-LANR 19
														KTP-LANR 30
														KTP-SANR 19
														KTP-LFNL 19
														KTP-SFNL 19

SPARE PARTS


Group of spare parts	Screw	Key				
DKT	USS 0617	HXK 3				

★ - For request only.

All dimensions in [mm]

KTP-LANL/R

Cartridges

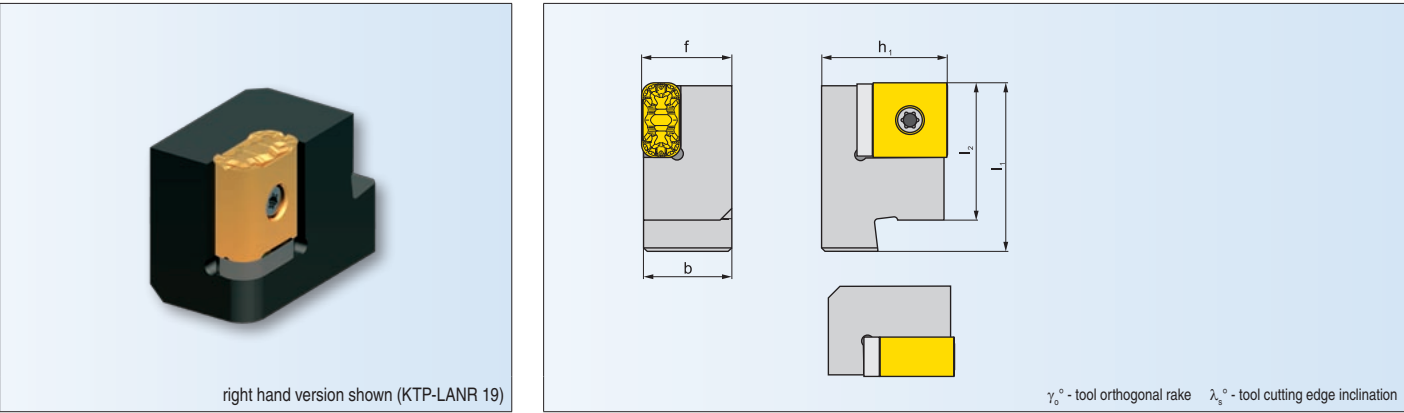


ISO	Assortment	Dimensions										kg	Spare parts	Inserts
		h ₁	b	f	l ₁	l ₂				λ _s °	γ _o °			
KTP-LANL 19	●	32	22,6	23	43	35				0	0	0,18	LN19	LNMX 191940 / LNUX 191940
KTP-LANR 19	●											0,18	LN19	
KTP-LANL 30	●											0,16	LN30	LNMX 301940 / LNUX 301940
KTP-LANR 30	●											0,16	LN30	

SPARE PARTS

Group of spare parts	Shim	Screw of shim	Clamping pin	Screwdriver	Key
LN19	LNX 19T350	US 4007-T07P	UP 1515-T15P	FLAG T07P	FLAG T15P
LN30					

KTP-LFNL/R

Cartridges

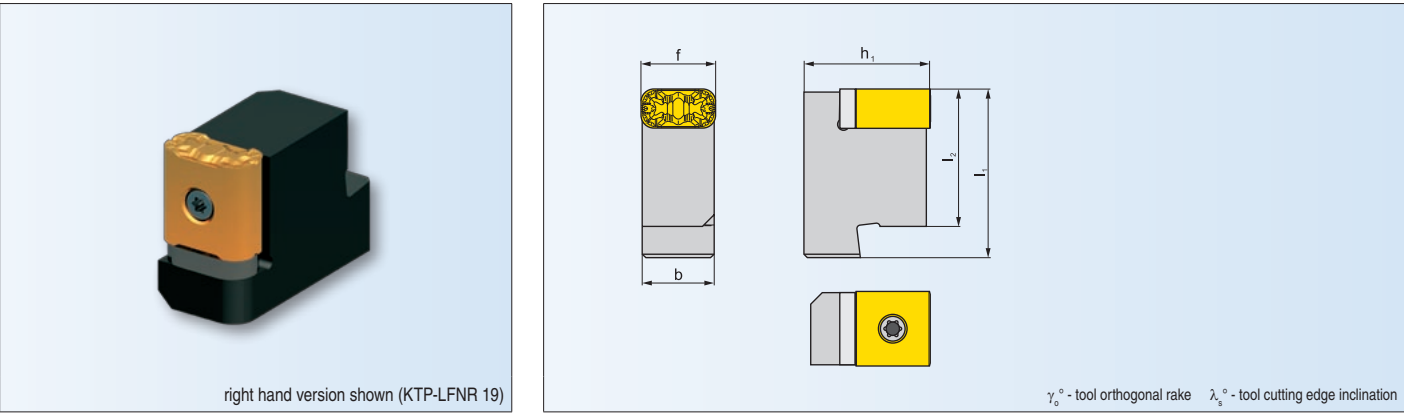

ISO	Assortment	Dimensions										kg	Spare parts	Inserts
		h ₁	b	f	l ₁	l ₂				λ _s °	γ _o °			
KTP-LFNL 19	●	32	18,25	19	43	35				0	0	0,14	LN19	LNMX 191940 / LNUX 191940
KTP-LFNR 19	●												LN19	

SPARE PARTS


Group of spare parts	Shim	Screw of shim	Clamping pin	Screwdriver	Key
LN19	LNX 19T350	US 4007-T07P	UP 1515-T15P	FLAG T07P	FLAG T15P

● Stock assortment ○ Non-stock assortment

All dimensions in [mm]

KTP-SANL/R

Cartridges

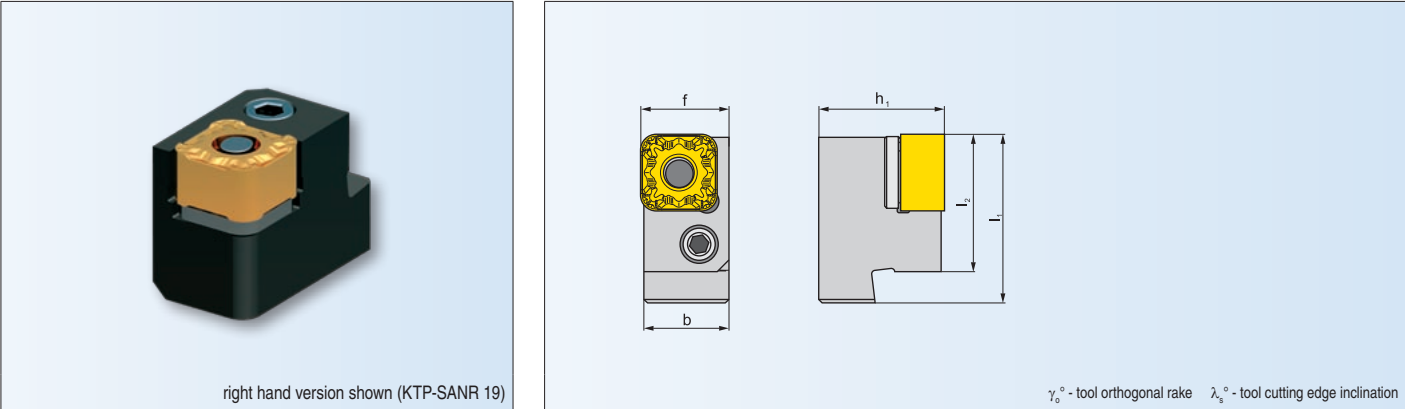


ISO	Assortment	Dimensions									kg	Spare parts	Inserts	
		h ₁	b	f	l ₁	l ₂				λ _s °				γ _o °
KTP-SANL 19	●	32	18,25	23	43	35				0	0	0,16	SN19	SNMX 191140
KTP-SANR 19	●													

SPARE PARTS

Group of spare parts	Shim	Clamping lever	Clamping screw	Tubular rivet	Mounting taper plug	Key
SN19	SNX 19X340	PU 16	US 95	NT 06	MT 06	HXK 4

KTP-SFNL/R

Cartridges

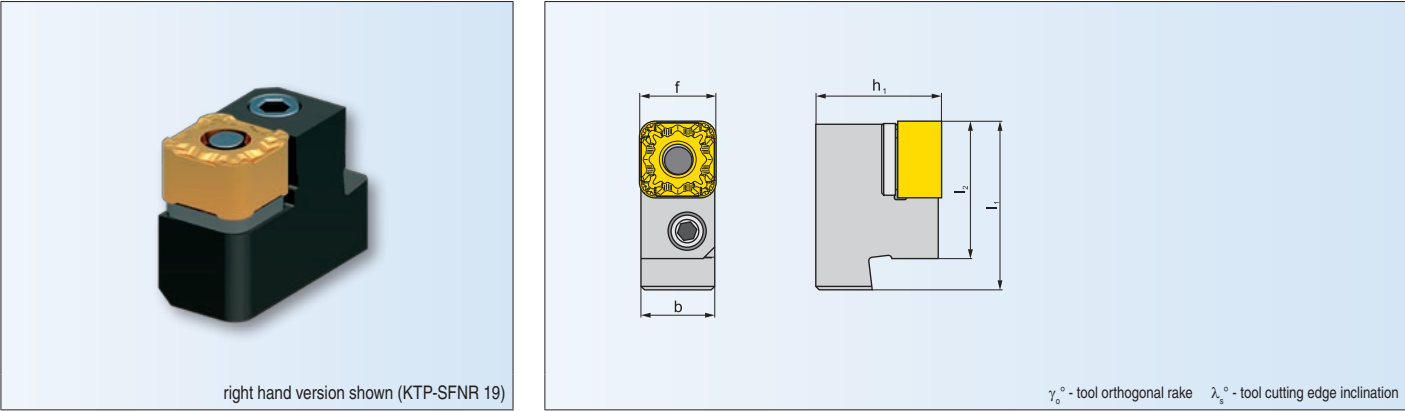


ISO	Assortment	Dimensions									kg	Spare parts	Inserts	
		h ₁	b	f	l ₁	l ₂				λ _s °				γ _o °
KTP-SFNL 19	●	32	18,25	19	43	35				0	0	0,13	SN19	SNMX 191140
KTP-SFNR 19	●													

SPARE PARTS

Group of spare parts	Shim	Clamping lever	Clamping screw	Tubular rivet	Mounting taper plug	Key
SN19	SNX 19X340	PU 16	US 95	NT 06	MT 06	HXK 4

DKTL/R

Holders for HEGENSCHIEDT lathes

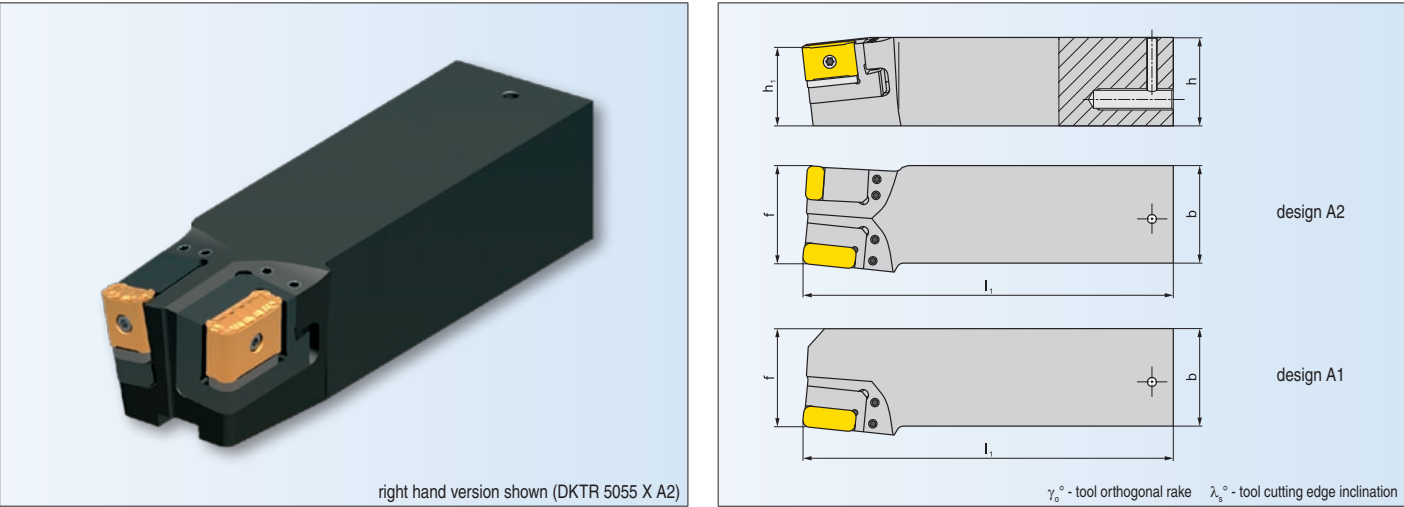

ISO	Assortment	Dimensions									kg	Spare parts	Cartridge	
		h	b	l ₁	h ₁	f				λ _s °				γ _o °
DKTL 5055 X A1	○	50	55	210	44	55				-6	-6	3,7	DKT	KTP-LANL 19
														KTP-LANL 30
														KTP-SANL 19
DKTR 5055 X A1	○	50	55	210	44	55				-6	-6	3,7	DKT	KTP-LANR 19
														KTP-LANR 30
														KTP-SANR 19
DKTL 5055 X A2	●	50	55	210	44	55				-6	-6	3,7	DKT	KTP-LANL 19
														KTP-LANL 30
														KTP-SANL 19
														KTP-LFNR 19
DKTR 5055 X A2	●	50	55	210	44	55				-6	-6	3,7	DKT	KTP-SFNR 19
														KTP-LANR 19
														KTP-LANR 30
														KTP-SANR 19
														KTP-LFNL 19
	KTP-SFNL 19													

SPARE PARTS

Group of spare parts	Screw	Key				
DKT	USS 0617	HXK 3				