

DIGITAL CALIPERS (STANDARD TYPE)



1108-150

DATA
OUTPUT

- Non waterproof
- Resolution .0005"/0.01mm
- Buttons: on/off, zero, inch/mm
- Automatic power off, move the digital unit to turn on power
- Battery CR2032, data output
- Made of stainless steel
- Optional accessory: wireless transmitter part no. 7315-25 (receiver is needed), accessory set for digital calipers (part no. 6144, only for range 0-6" and 0-8"), depth base attachment (part no. 6140)

Part No.	Range	Accuracy	Price (\$)
1108-150	0-6"/0-150mm	±.0010"	82.30
1108-200	0-8"/0-200mm	±.0015"	123.00
1108-300	0-12"/0-300mm	±.0015"	185.00

IP67 WATERPROOF DIGITAL CALIPERS



ATTENTION: IT IS NECESSARY TO SET ZERO AFTER POWER ON EACH TIME



1118-150B

IP67
WATERPROOF

ATTENTION: NO
DATA OUTPUT

- Resolution .0005"/0.01mm
- IP67 dust/waterproof
- Button function: zero, on/off, inch/mm, ABS/REL, hold
- Battery CR2032
- Made of stainless steel
- Optional accessory: accessory set for digital calipers (part no. 6144, only for range 0-6" and 0-8"), depth base attachment (part no. 6140)


Part No.	Range	Accuracy	Price (\$)
1118-150B	0-6"/0-150mm	±.0015"	263.00
1118-200B	0-8"/0-200mm	±.0015"	404.00
1118-300B	0-12"/0-300mm	±.0015"	483.00

DIAL CALIPERS



SHOCK
PROOF

- Dial indicator graduation .001"
- Shockproof dial indicator
- Made of stainless steel

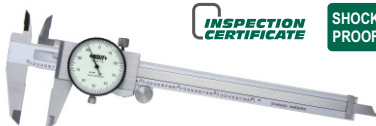

1311-6

Part No.	Range	Accuracy	Price (\$)
1311-6	0-6"	±.0015"	87.60
1311-8	0-8"	±.0020"	116.00
1311-12	0-12"	±.0020"	194.00

PISTOL GRIP THREE POINTS BORE GAUGES



- Optional accessory: digital indicators (part no. 2103-10FE, resolution .00005"/0.001mm), setting rings (part no. 6313)



2124-E08

digital indicator
is optional

Individual

Part No.	Range	Accuracy (without digital indicator)	Setting ring	Extension rod	Price (\$)
2124-E035	.275-.35"	.00015"	.275" DIA (included)	4" (included)	769.00
2124-E0425	.35-.425"	.00015"	.35" DIA (included)	4" (included)	752.00
2124-E05	.425-.5"	.00015"	.5" DIA (included)	4" (included)	799.00
2124-E065	.5-.65"	.00015"	.65" DIA (included)	6" (included)	806.00
2124-E08	.65-.8"	.00015"	.65" DIA (included)	6" (included)	856.00
2124-E1	.8-1"	.00015"	1" DIA (included)	6" (included)	912.00
2124-E112	1-1.2"	.00015"	1" DIA (included)	6" (included)	973.00
2124-E16	1.2-1.6"	.00015"	1.6" DIA (included)	6" (included)	1045.00
2124-E2	1.6-2"	.00020"	1.6" DIA (included)	6" (included)	1112.00
2124-E25	2-2.5"	.00020"	2.5" DIA (included)	6" (included)	1207.00
2124-E3	2.5-3"	.00020"	2.5" DIA (included)	6" (included)	1284.00
2124-E35	3-3.5"	.00020"	3.5" DIA (included)	6" (included)	1366.00
2124-E4	3.5-4"	.00020"	3.5" DIA (included)	6" (included)	1455.00
2124-E5	4-5"	.00025"	optional	6" (included)	1531.00
2124-E6	5-6"	.00025"	optional	6" (included)	1764.00

Set

Part No.	Range	Probes included	Setting ring (included)	Extension rod	Price (\$)
2124-E053	.275-.5"	.275-.35", .35-.425", .425-.5"	.275" DIA, .35" DIA, .5" DIA	4" (included)	1961.00
2124-E082	.5-.8"	.5-.65", .65-.8"	.65" DIA	6" (included)	1455.00
2124-E24	.8-2"	.8-1", 1-1.2", 1.2-1.6", 1.6-2"	1" DIA, 1.6" DIA	6" (included)	3552.00
2124-E44	2-4"	2-2.5", 2.5-3", 3-3.5", 3.5-4"	2.5" DIA, 3.5" DIA	6" (included)	4433.00

MAGNETIC STAND

- For digital/dial indicators and dial test indicators
- Applicable holding stem: 3/8" DIA, Ø8mm, Ø4mm
- With fine adjustment




6201-60

Part No.	Magnetic force	Price (\$)
6201-60	132lbf	42.40


OUTSIDE MICROMETERS WITH INTERCHANGEABLE ANVILS

- Graduation .0001"
- Ratchet stop
- Carbide measuring faces
- Supplied with setting standards



3206-6

Part No.	Range	Accuracy	Setting standard (included)	Price (\$)
3206-4	0-4"	.00020"	1", 2", 3"	316.00
3206-6	0-6"	.00025"	1", 2", 3", 4", 5"	371.00
3206-8	4-8"	.00030"	4", 5", 6", 7"	433.00
3206-12	6-12"	.00035"	6", 7", 8", 9", 10", 11"	485.16
3206-121	8-12"	.00035"	8", 9", 10", 11"	523.00



DIAL INDICATORS



- Graduation .001"
- Dial reading: 0-100
- Meet ASME B89.1.10M-2001
- With lug back
- Supplied with limit pointers and bezel clamp
- Optional accessory: backs, contact points



2307-1

Part No.	Range	Accuracy		Range/rev	Maximum measuring force	Cap	Price (\$)
		First 2.5 rev	Overall				
2307-1	1"	±.001"	±.002"	.1"	.405lbf	can lift	50.80
2307-2	2"	±.001"	±.004"	.1"	.562lbf	cannot lift	122.00

DIAL TEST INDICATORS

JEWELLED
BEARING



- Dial reading: 0-15-0
- Jeweled bearing
- Carbide contact point
- Two measuring directions
- Anti magnetic body
- Supplied with two clamps: 5/32" DIA and 3/8" DIA
- Optional accessory: styli




2380-35

Part No.	Range	Graduation	Accuracy	Price (\$)
2380-31	.03"	.001"	±.001"	109.00
2380-35	.03"	.0005"	±.0005"	130.00

DIGITAL MEASURING MICROSCOPE

MEASUREMENT TAKE PICTURES

BUILT-IN SOFTWARE
WITHOUT COMPUTER

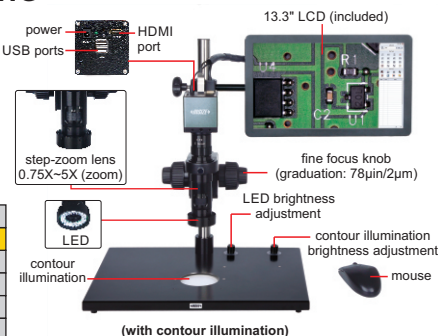

SPECIFICATION

Part No.	ISM-DL301
Price (\$)	4634.00
Magnification	15X-100X
Sensor	1/2" CMOS
Pixel	2M
Resolution	1920x1080
Frame rate	60fps
Output	HDMI
Power supply	power adapter
Dimension (LxWxH)	22.44x11.81x16.93"
Net weight	14.44lb